

SPECIFICATIONS


MECHANICAL

Mechanical Life: 1000 operation cycles per switch.
Operation Force: 500gf max.
Operation Temp: -40°C to 85°C

ELECTRICAL

Electrical Life: 1000 operation cycles per switch 24VDC,25mA
Non-Switching Rating: 100mA,50VDC
Contact Resistance: 100mΩ max.at initial.
Insulation Resistance: 100MΩ min (at 500VDC)
Dielectric Strength: 300VAC/1 minute
Capacitance: 5pf max.

HOW TO ORDER


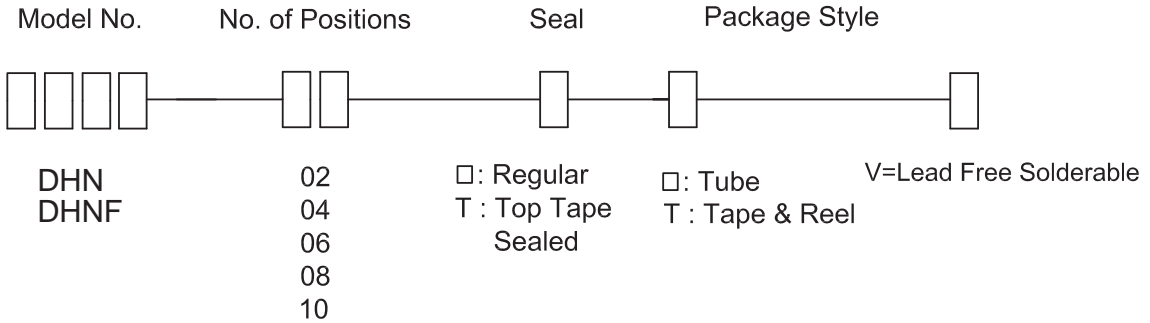


TERMINATION / NUMBER OF POSITIONS



DHN

DHN -10	10	13.93[.548]
DHN - 8	8	11.39[.448]
DHN - 6	6	8.85[.348]
DHN - 4	4	6.31[.248]
DHN - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

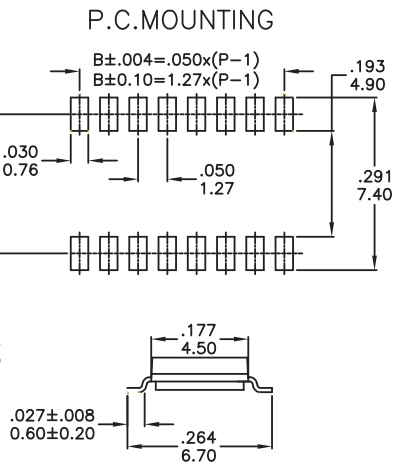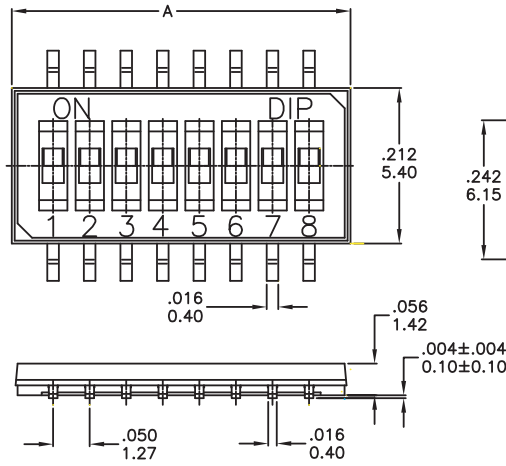

DHNF

DHNF -10	10	13.93[.548]
DHNF - 8	8	11.39[.448]
DHNF - 6	6	8.85[.348]
DHNF - 4	4	6.31[.248]
DHNF - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

